




Miniature flat 7-core watertight connector

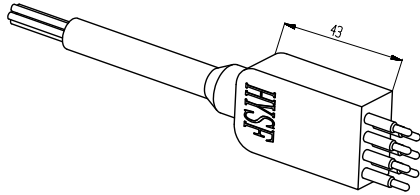


Flat 7-core male cable
SFMCLPIL7M

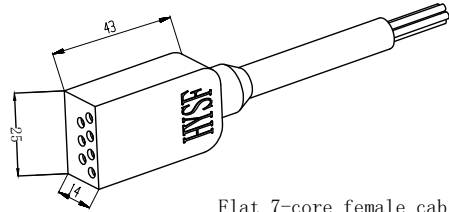


Flat 7-core female cable
SFMCLPIL7F

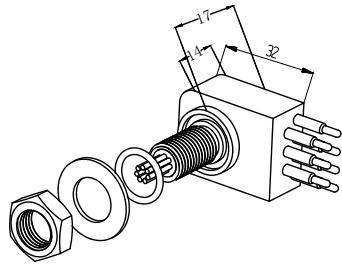


Flat 7-core male seat
SFMCLPBH7M

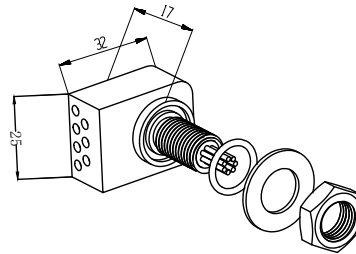


Flat 7-core female seat
SFMCLPBH7F

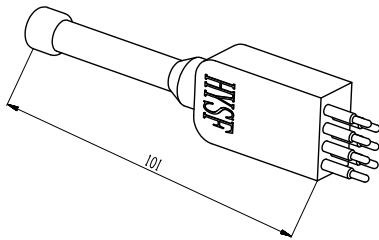


Flat 7-core male plug
SFMCLPDC7M

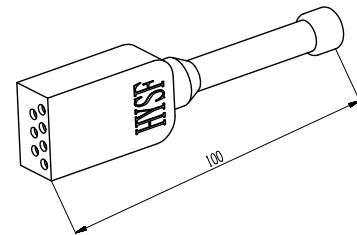


Flat 7-core female plug
SFMCLPDC7F



Public view

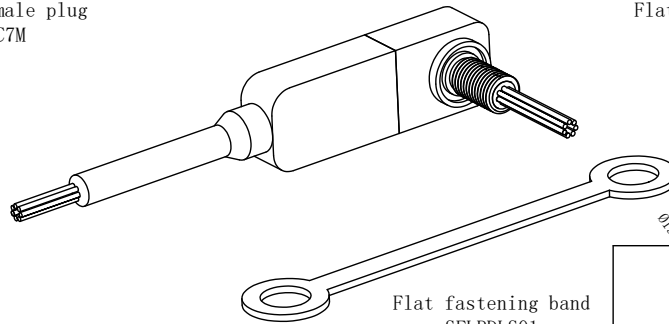

Flat fastening band
SFLPDL501



Miniature flat 7-core cable plug color:

1: Red	2: Black
3: Yellow	4: Blue
5: Orange	6: Brown
7: Purple	

Main parameters:

Electrical parameters of
Miniature flat 7-core: 550V @ 5A
Insulation resistance: >200 MΩ
contact resistance: <0.01 Ω
Wet plug and pull times: >500次
Operating temperature: -60° ~ +80° C
Working depth: 6000M(60 MPa)

Material parameters:


Plug body: Neoprene
Socket body: Neoprene
Cable body: Polyurethane, Neoprene
Needle core: Copper gilding

Installation requirements:
Installation radius: 33
Surface finish: Ra1.6


Dimension units: millimeter
Thread unit: inch
Mounting thread: 7/16-20UNF-2A
Thread length: 25mm

Can be customized upon request


Miniature flat 9-core watertight connector

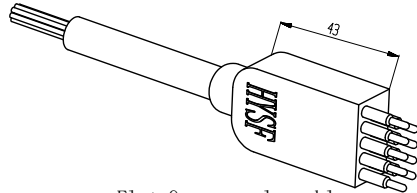


Flat 9-core male cable
SFMCLPIL9M

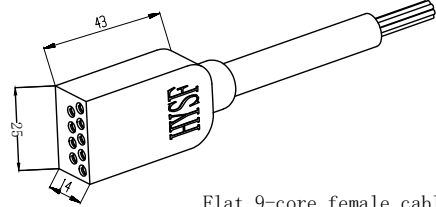


Flat 9-core female cable
SFMCLPIL9F

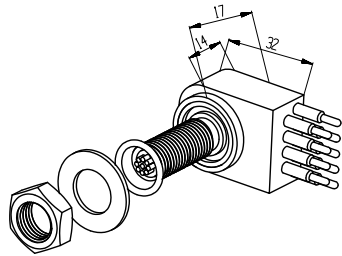


Flat 9-core male seat
SFMCLPBH9M

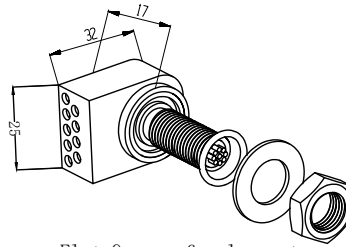


Flat 9-core female seat
SFMCLPBH9F

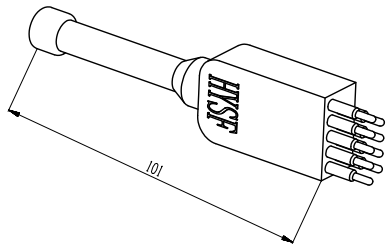


Flat 9-core male plug
SFMCLPDC9M

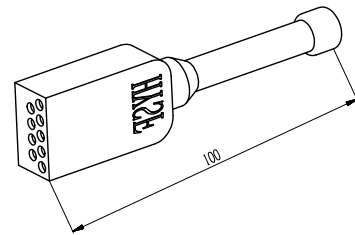



Flat 9-core female plug
SFMCLPDC9F



Public view

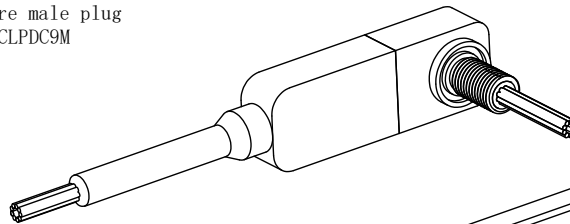

Flat fastening band
SFLPDLS01



Miniature flat 9-core cable plug color:

1: White	
2: Red	3: Black
4: Yellow	5: Blue
6: Orange	7: Brown
8: Purple	9: Green

Main parameters:

Electrical parameters of
Miniature flat 9-core: 550V @ 5A
Insulation resistance: >200 MΩ
Contact resistance: <0.01 Ω
Wet plug and pull times: >500次
Operating temperature: -60° ~ +80° C
Working depth: 6000M(60 MPa)

Material parameters:

Plug body: Neoprene
Socket body: Neoprene
Cable body: Polyurethane, Neoprene
Needle core: Copper gilding


Installation requirements:
Installation radius: 33
Surface finish: Ra1.6

Dimension units: millimeter


Thread unit: inch
Mounting thread: 7/16-20UNF-2A
Thread length: 25mm

Can be customized upon request


Standard flat 2-core watertight connector

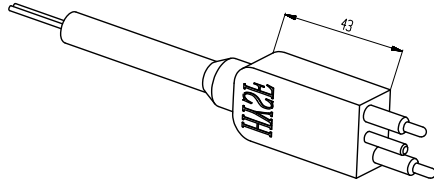


Flat 2-core male cable
SFLPIL2M

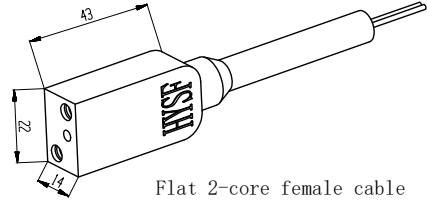


Flat 2-core female cable
SFLPIL2F

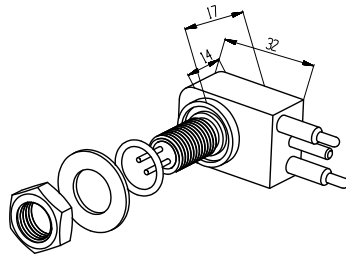


Flat 2-core male seat
SFLPBH2M

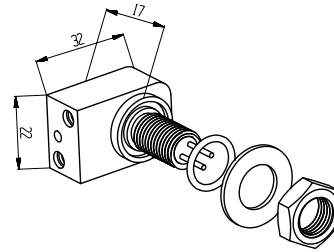


Flat 2-core female seat
SFLPBH2F

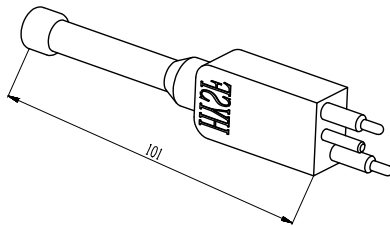


Flat 2-core male plug
SFLPDC2M

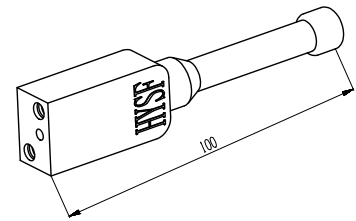



Flat 2-core female plug
SFLPDC2F



Public view

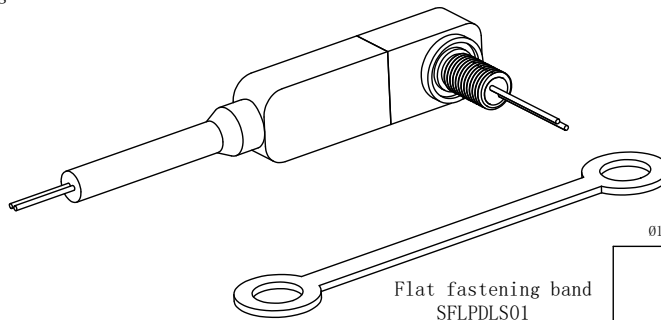


Flat fastening band
SFLPDL501




<p>Flat 2-core cable plug color: 1: Red 2: Black</p>	<p>Main parameters: Electrical parameters of Flat 2-core: 550V @ 10A Insulation resistance: >200 MΩ contact resistance: <0.01Ω Wet plug and pull times: >500次 Operating temperature: -60° ~ +80° C Working depth: 6000M(60 MPa)</p>	<p>Material parameters: Plug body: Neoprene Socket body: Neoprene Cable body: Polyurethane, Neoprene Needle core: Copper gilding Installation requirements: Installation radius: 33 Surface finish: Ra1.6</p>	<p>Dimension units: millimeter Thread unit: inch Mounting thread: 7/16-20UNF-2A Thread length: 25mm Can be customized upon request</p>
--	--	---	--


Standard flat 3-core watertight connector

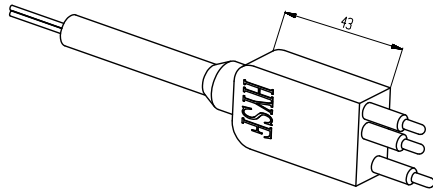


Flat 3-core male cable
SFLPIL3M

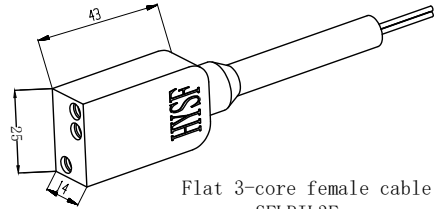


Flat 3-core female cable
SFLPIL3F

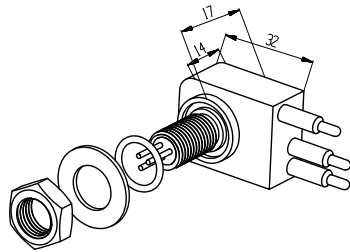


Flat 3-core male seat
SFLPBH3M

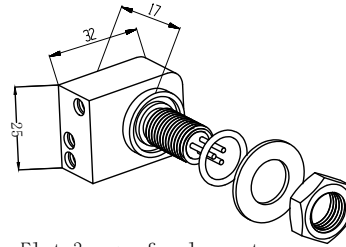


Flat 3-core female seat
SFLPBH3F

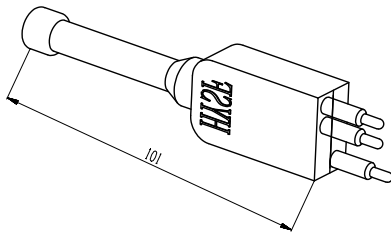


Flat 3-core male plug
SFLPDC3M

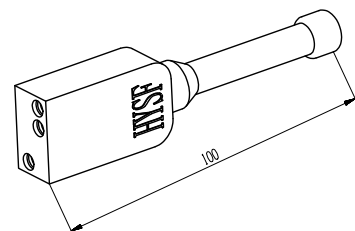


Flat 3-core female plug
SFLPDC3F



Public view

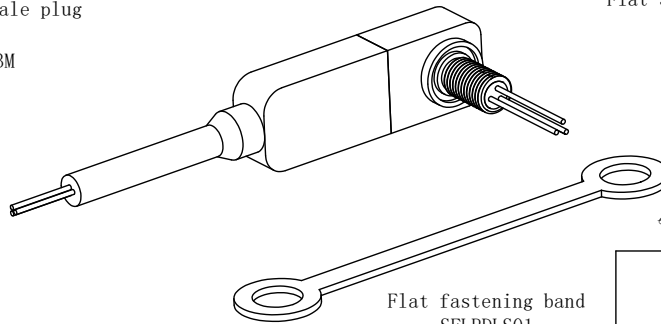

Flat fastening band
SFLPDL01

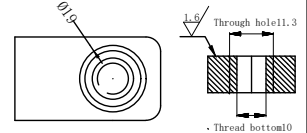

Flat 3-core cable plug color:

1: Red 2: Black 3: Brown

Main parameters:

Electrical parameters of
Flat 3-core: 550V @ 10A
Insulation resistance: >200 MΩ
contact resistance: <0.01 Ω
Wet plug and pull times: >500次
Operating temperature: -60° ~ +80° C
Working depth: 6000M(60 MPa)

Material parameters:


Plug body: Neoprene
Socket body: Neoprene
Cable body: Polyurethane, Neoprene
Needle core: Copper gilding

Installation requirements:
Installation radius: 33
Surface finish: Ra1.6


Dimension units: millimeter
Thread unit: inch
Mounting thread: 7/16-20UNF-2A
Thread length: 25mm

Can be customized upon request


Standard flat 4-core watertight connector

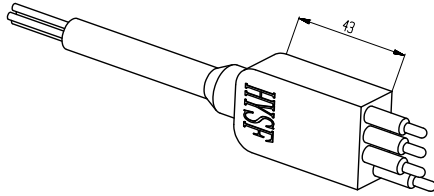


Flat 4-core male cable
SFLPIL4M

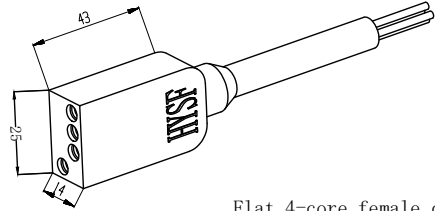


Flat 4-core female cable
SFLPIL4F

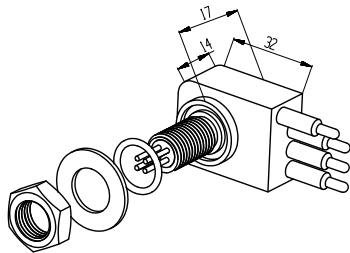


Flat 4-core male seat
SFLPBH4M

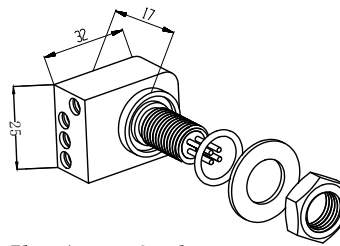


Flat 4-core female seat
SFLPBH4F

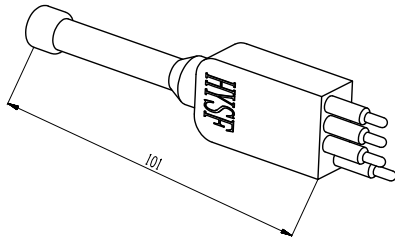


Flat 4-core male plug
SFLPDC4M

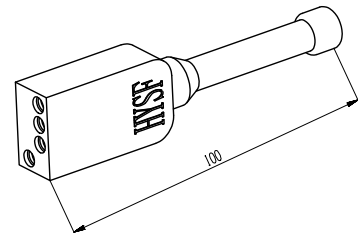


Flat 4-core female plug
SFLPDC4F



Public view

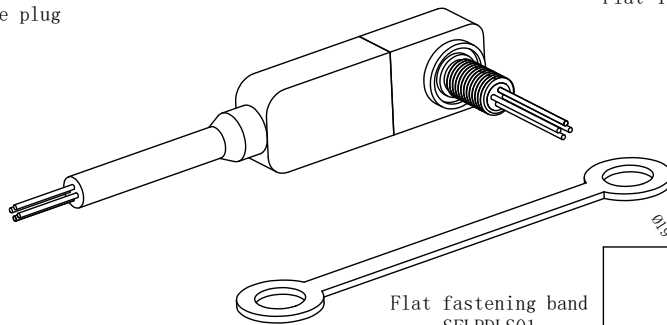

Flat fastening band
SFLPDL501

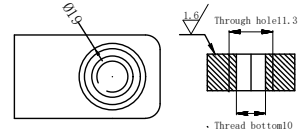

Flat 3-core cable plug color:

1: Red 2: Black
3: Brown 4: Blue

Main parameters:

Electrical parameters of
Flat 4-core: 550V @ 10A
Insulation resistance: >200 MΩ
contact resistance: <0.01 Ω
Wet plug and pull times: >500次
Operating temperature: -60° ~ +80° C
Working depth: 6000M(60 MPa)

Material parameters:

Plug body: Neoprene
Socket body: Neoprene
Cable body: Polyurethane, Neoprene
Needle core: Copper gilding


Installation requirements:

Installation radius: 33
Surface finish: Ra1.6


Dimension units: millimeter
Thread unit: inch
Mounting thread: 7/16-20UNF-2A
Thread length: 25mm

Can be customized upon request


Standard flat 5-core watertight connector

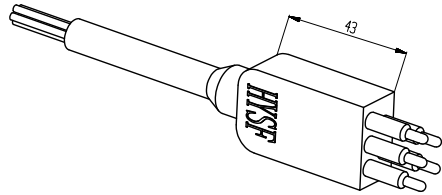


Flat 5-core male cable
SFLPIL5M

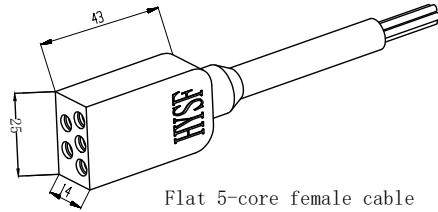


Flat 5-core female cable
SFLPIL5F

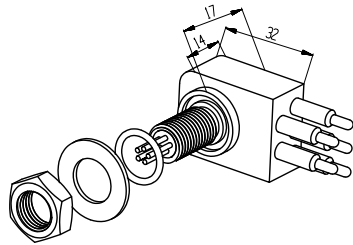


Flat 5-core male seat
SFLPBH5M

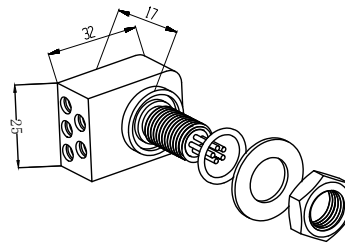

Flat 5-core female seat
SFLPBH5F

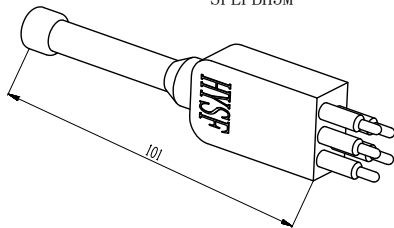


Flat 5-core male plug
SFLPDC5M

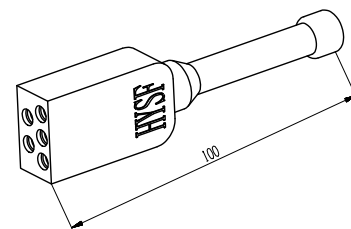



Flat 5-core female plug
SFLPDC5F



Public view

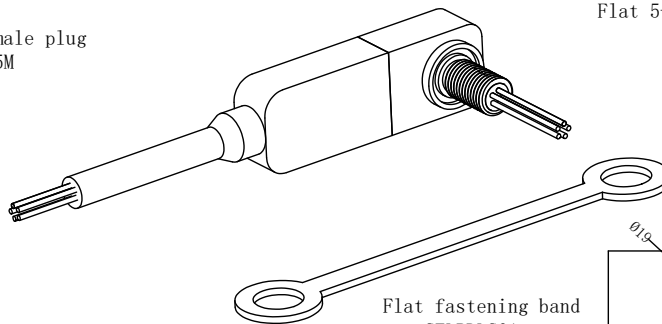

Flat fastening band
SFLPDL501



Flat 5-core cable plug color:

- | | |
|-----------|----------|
| 1: Red | 2: Black |
| 3: Brown | 4: Blue |
| 5: Orange | |

Main parameters:

Electrical parameters of
Flat 5-core: 550V @ 10A
Insulation resistance: >200 MΩ
contact resistance: <0.01Ω
Wet plug and pull times: >500次
Operating temperature: -60° ~ +80° C
Working depth: 6000M(60 MPa)

Material parameters:


Plug body: Neoprene
Socket body: Neoprene
Cable body: Polyurethane, Neoprene
Needle core: Copper gilding

Installation requirements:
Installation radius: 33
Surface finish: Ra1.6


Dimension units: millimeter
Thread unit: inch
Mounting thread: 7/16-20UNF-2A
Thread length: 25mm

Can be customized upon request


Standard flat 7-core watertight connector

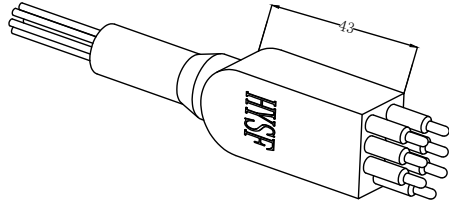


Flat 7-core male cable
SFLPIL7M

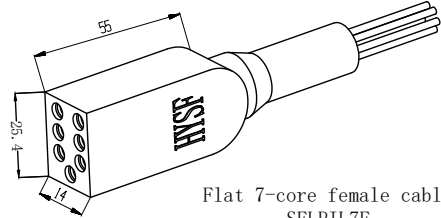


Flat 7-core female cable
SFLPIL7F

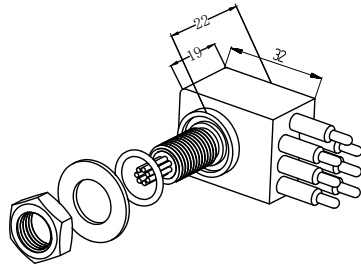


Flat 7-core male seat
SFLPBH7M

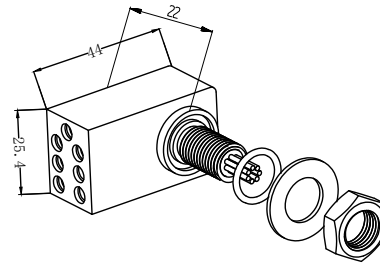


Flat 7-core female seat
SFLPBH7F

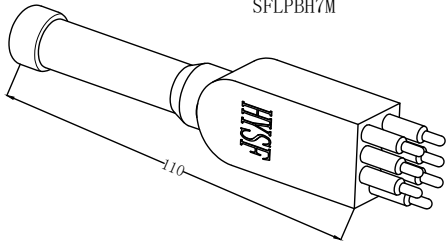


Flat 7-core male plug
SFLPDC7M

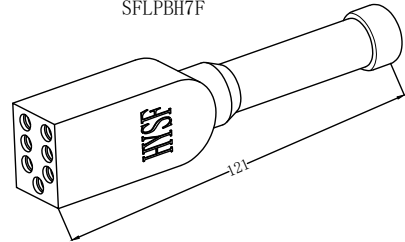



Flat 7-core female plug
SFLPDC7F



Public view

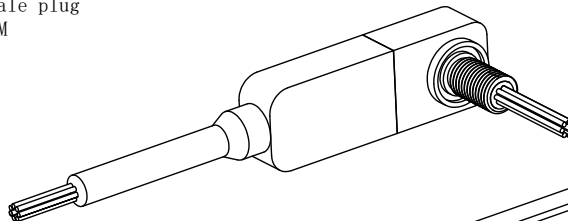

Flat fastening band
SFLPDL502



Flat 7-core cable plug color:

1: Red	2: Black
3: Yellow	4: Blue
5: Orange	6: Brown
7: Purple	

Main parameters:

Electrical parameters of
Flat 7-core: 550V @ 10A
Insulation resistance: >200 MΩ
contact resistance: <0.01Ω
Wet plug and pull times: >500次
Operating temperature: -60° ~ +80° C
Working depth: 6000M(60 MPa)

Material parameters:

Plug body: Neoprene
Socket body: Neoprene
Cable body: Polyurethane、Neoprene
Needle core: Copper gilding


Installation requirements:

Installation radius: 30.3
Surface finish: Ra1.6


Dimension units: millimeter
Thread unit: inch
Mounting thread: 7/16-20UNF-2A
Thread length: 25mm

Can be customized upon request


Standard flat 9-core watertight connector

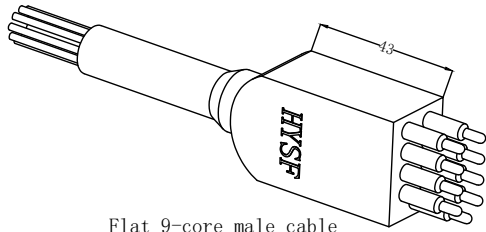


Flat 9-core male cable
SFLPIL9M

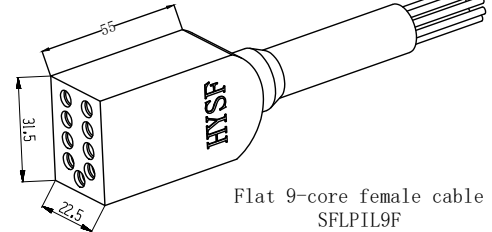


Flat 9-core female cable
SFLPIL9F

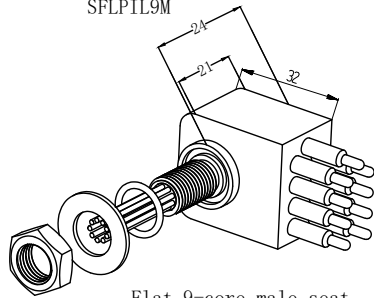


Flat 9-core male seat
SFLPBH9M

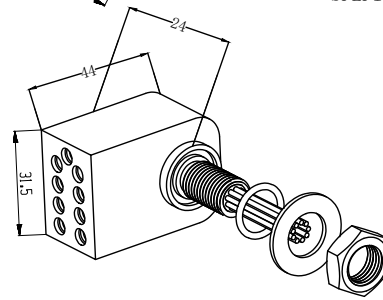


Flat 9-core female seat
SFLPBH9F

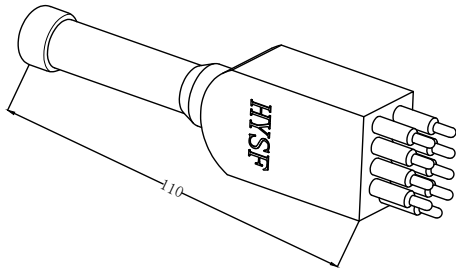


Flat 9-core male plug
SFLPDC9M

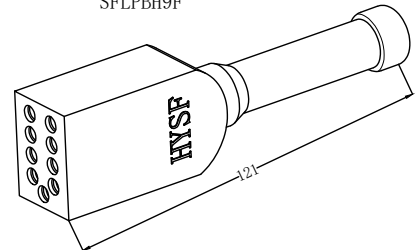



Flat 9-core female plug
SFLPDC9F



Public view

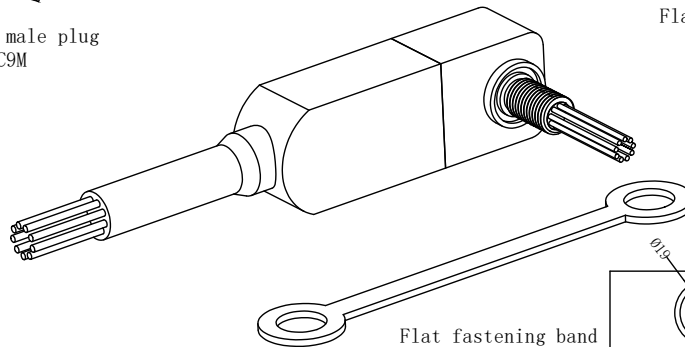

Flat fastening band
SFLPDS02



Flat 9-core cable plug color:

1: White	3: Black
2: Red	5: Blue
4: Yellow	7: Brown
6: Orange	9: Green

Main parameters:

Electrical parameters of
Flat 9-core: 550V @ 10A
Insulation resistance: >200 MΩ
contact resistance: <0.01 Ω
Wet plug and pull times: >500次
Operating temperature: -60° ~ +80° C
Working depth: 6000M(60 MPa)

Material parameters:

Plug body: Neoprene
Socket body: Neoprene
Cable body: Polyurethane, Neoprene
Needle core: Copper gilding

Installation requirements:
Installation radius: 30.3
Surface finish: Ra1.6

Dimension units: millimeter


Thread unit: inch

Mounting thread: 7/16-20UNF-2A


Thread length: 25mm

Can be customized upon request


Standard flat 13-core watertight connector

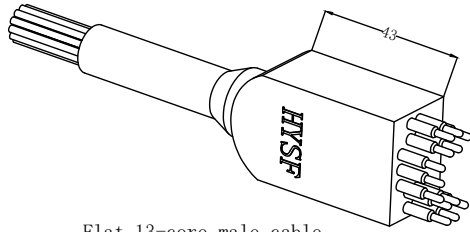


Flat 13-core male cable
SFLPIL13M

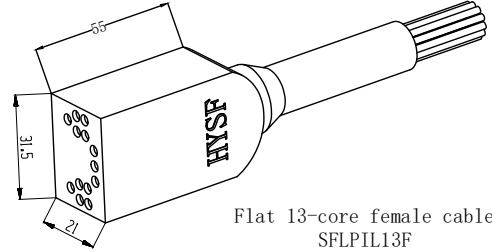


Flat 13-core female cable
SFLPIL13F

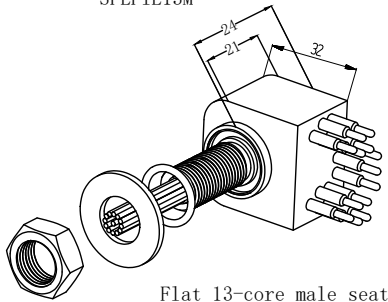


Flat 13-core male seat
SFLPBH13M

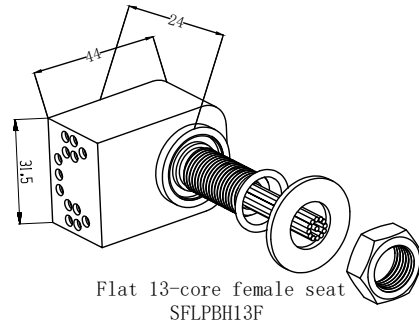


Flat 13-core female seat
SFLPBH13F

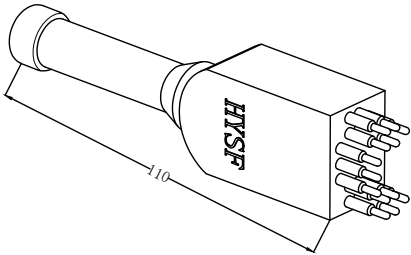


Flat 13-core male plug
SFLPDC13M

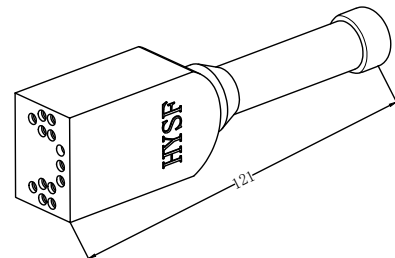


Flat 13-core female plug
SFLPDC13F



Public view

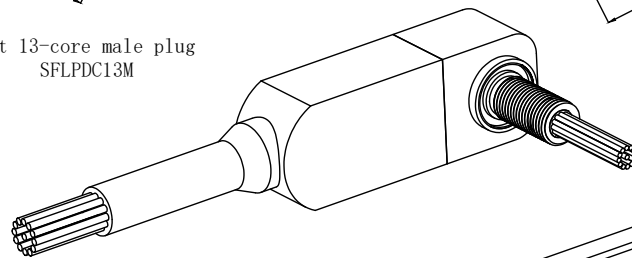

Flat fastening band
SFLPDS02

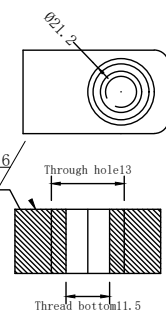

<p>Flat 13-core cable plug color:</p> <ul style="list-style-type: none"> 1: Red (Coarse) 2: Black (Coarse) 3: Yellow (Coarse) 4: Orange and white (Coarse) 5: Orange (Coarse) 6: Green and white 7: Blue 8: Blue and white 9: Green 10: Brown and white 11: Brown 12: Blue 13: Brown 	<p>Main parameters:</p> <p>Electrical parameters of Flat 13-core: 550V @ 5A Insulation resistance: >200 MΩ contact resistance: <0.01 Ω Wet plug and pull times: >500次 Operating temperature: -60° ~ +80° C Working depth: 6000M(60 MPa)</p>	<p>Material parameters:</p> <p>Plug body: Neoprene Socket body: Neoprene Cable body: Polyurethane、Neoprene Needle core: Copper gilding</p> <p>Installation requirements: Installation radius: 30.3 Surface finish: Ra1.6</p>	<p>Dimension units: millimeter Thread unit: inch Mounting thread: 1/2-20UNF-2A Thread length: 25mm</p>
---	--	--	--