



Photoelectric connector

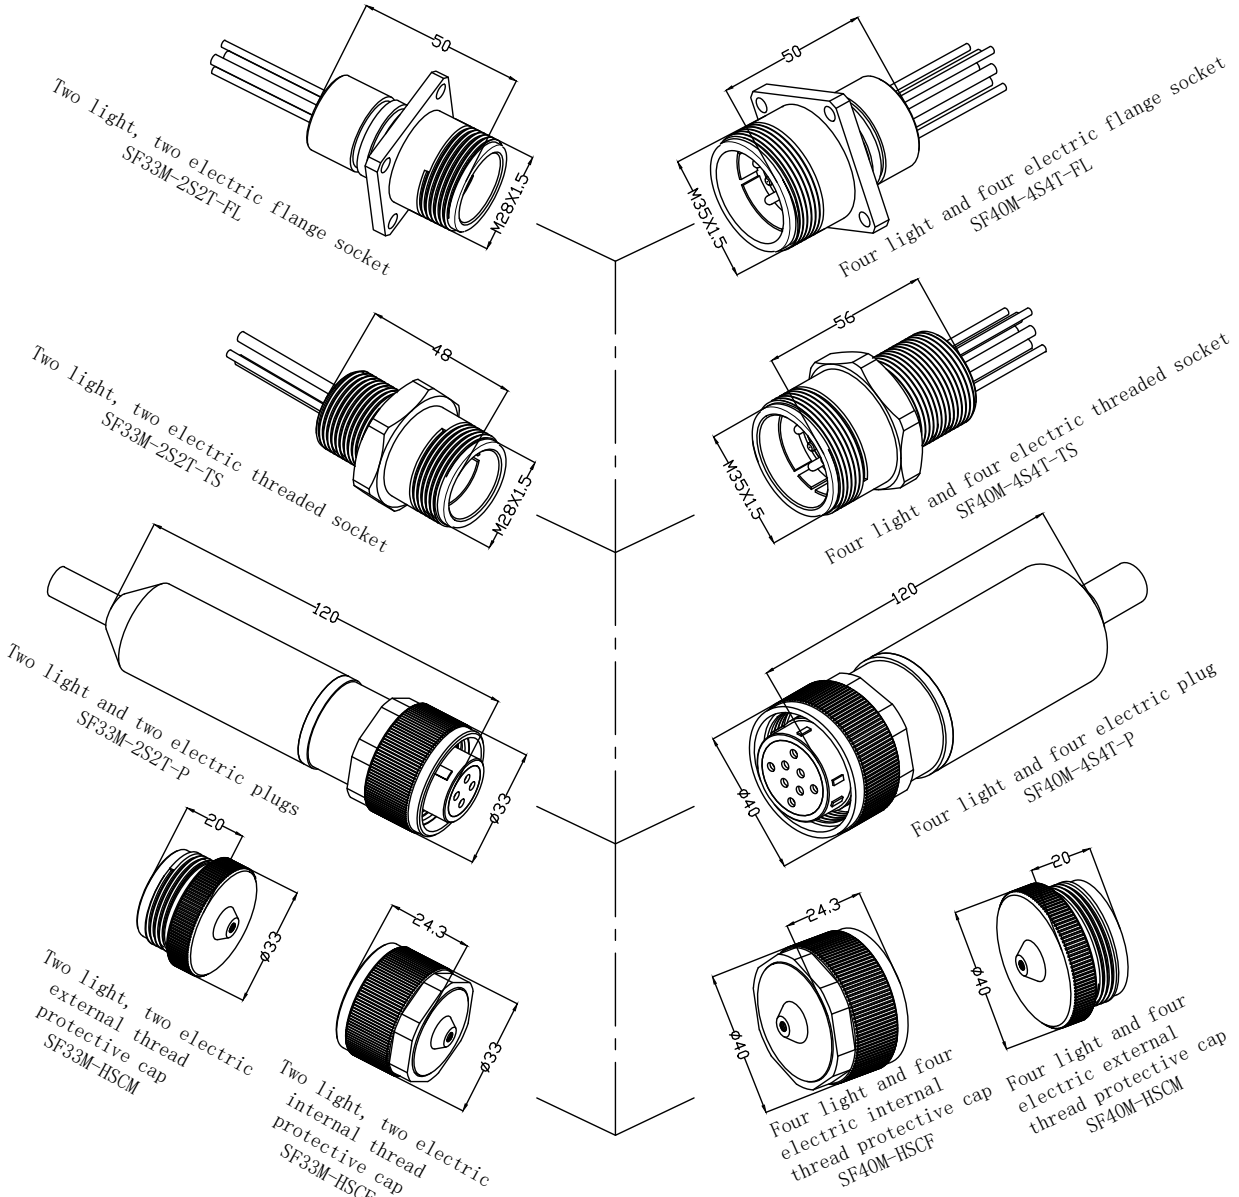

Public view



	Flange socket	Threaded socket	plug	Internal thread protective cap	External thread protective cap	Insertion loss IL (dB)	Tail fiber bending radius	conductor cross-section (mm ²)	electric current	insulation resistance	Water pressure resistance (Mpa)	Cable bending radius
One light	SF27M-1S-FL	SF27M-1S-TS	SF27M-1S-P	SF27M-HSCF	SF27M-HSCM	≤1dB	≥30D	/	/	/	60	≥10D
Two lights and two electricity	SF33M-2S2T-FL	SF33M-2S2T-TS	SF33M-2S2T-P	SF33M-HSCF	SF33M-HSCM	≤1dB	≥30D	1.5	13A	500V220MΩ	60	≥10D
Four lights	SF33M-4S-FL	SF33M-4S-TS	SF33M-4S-P	SF33M-HSCF	SF33M-HSCM	≤1dB	≥30D	/	/	/	60	≥10D
Two lights and six electricity	SF40M-2S6T-FL	SF40M-2S6T-TS	SF40M-2S6T-P	SF40M-HSCF	SF40M-HSCM	≤1dB	≥30D	1.5	13A	500V220MΩ	60	≥10D
Four lights and four electricity	SF40M-4S4T-FL	SF40M-4S4T-TS	SF40M-4S4T-P	SF40M-HSCF	SF40M-HSCM	≤1dB	≥30D	1.5	13A	500V220MΩ	60	≥10D
Six lights and two electricity	SF40M-6S2T-FL	SF40M-6S2T-TS	SF40M-6S2T-P	SF40M-HSCF	SF40M-HSCM	≤1dB	≥30D	1.5	13A	500V220MΩ	60	≥10D
Eight lights	SF40M-8S-FL	SF40M-8S-TS	SF40M-8S-P	SF40M-HSCF	SF40M-HSCM	≤1dB	≥30D	/	/	/	60	≥10D