


Round small 2 - 4 core watertight connector

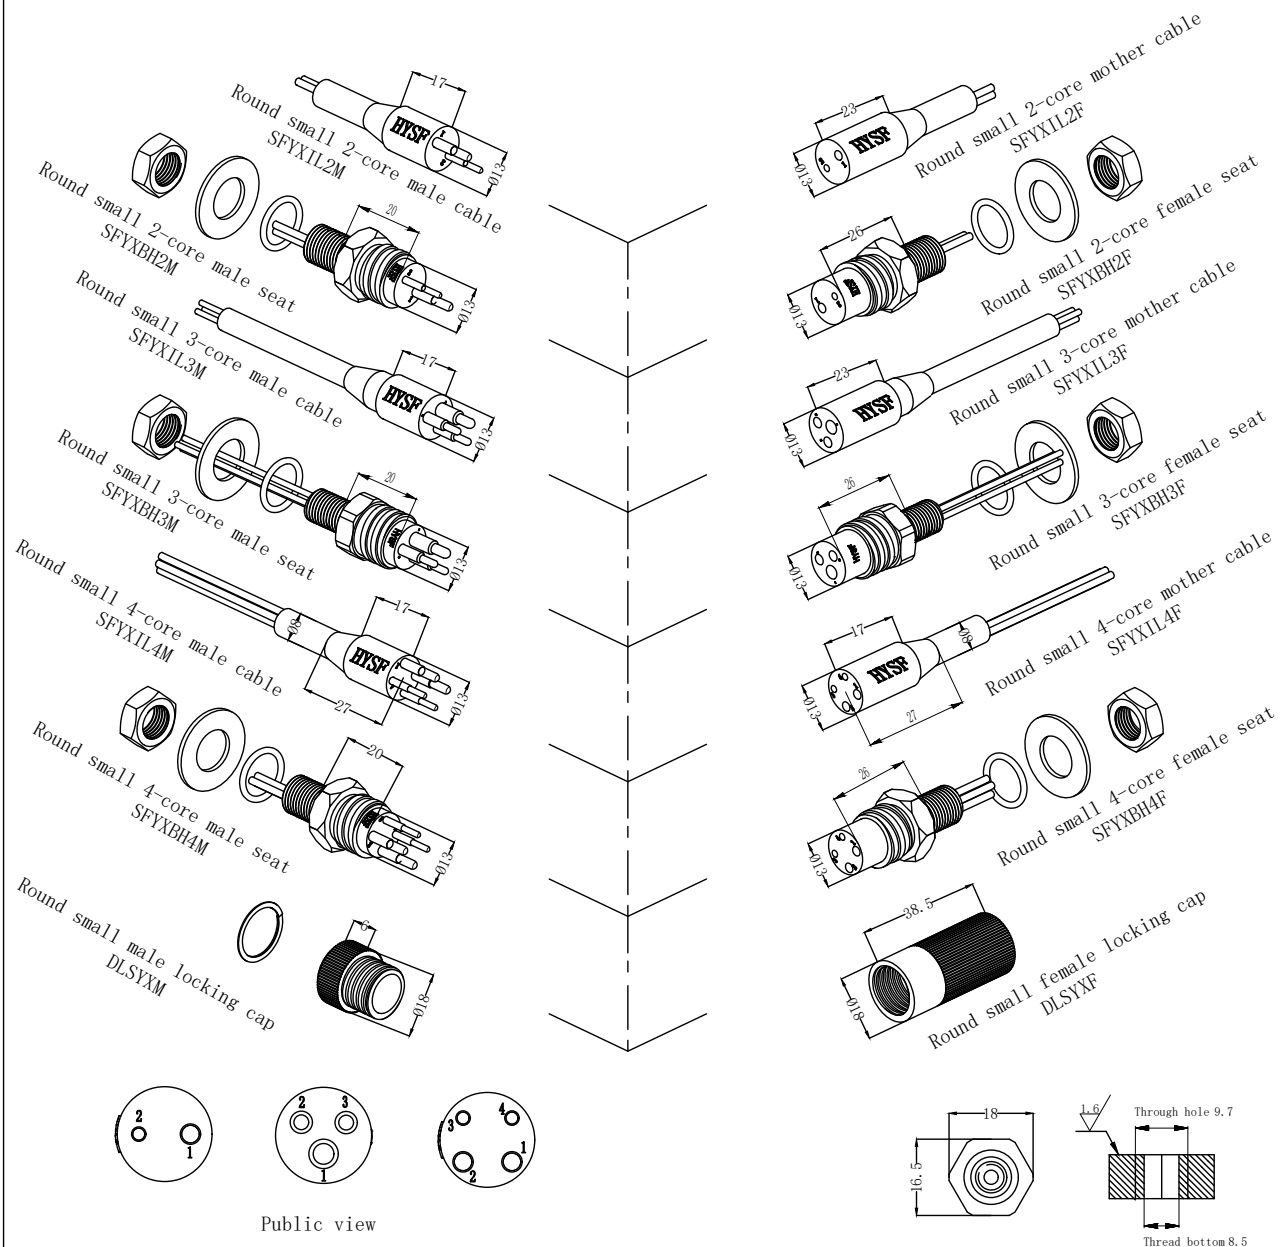

Main parameters:

Electrical parameters of
 Round small 5-6 core: 550V @ 5A
 Insulation resistance: >200 MΩ
 contact resistance: <0.01 Ω
 Wet plug and pull times: >500次
 Operating temperature: -60° ~ +80° C
 Working depth: 6000M (60 MPa)


Material parameters:

Plug body: Neoprene
 Socket body: 316L stainless steel, Titanium alloy, Sea copper
 Cable body: Polyurethane, Neoprene
 Needle core: Copper gilding
Installation requirements:
 Installation radius: 9.3
 Surface finish: Ra1.6

Dimension units: millimeter
 Thread unit: inch
 Mounting thread: 3/8-24UNF-2A
 Thread length: 15mm

Can be customized upon request

Round small 5-and 6-core watertight connector

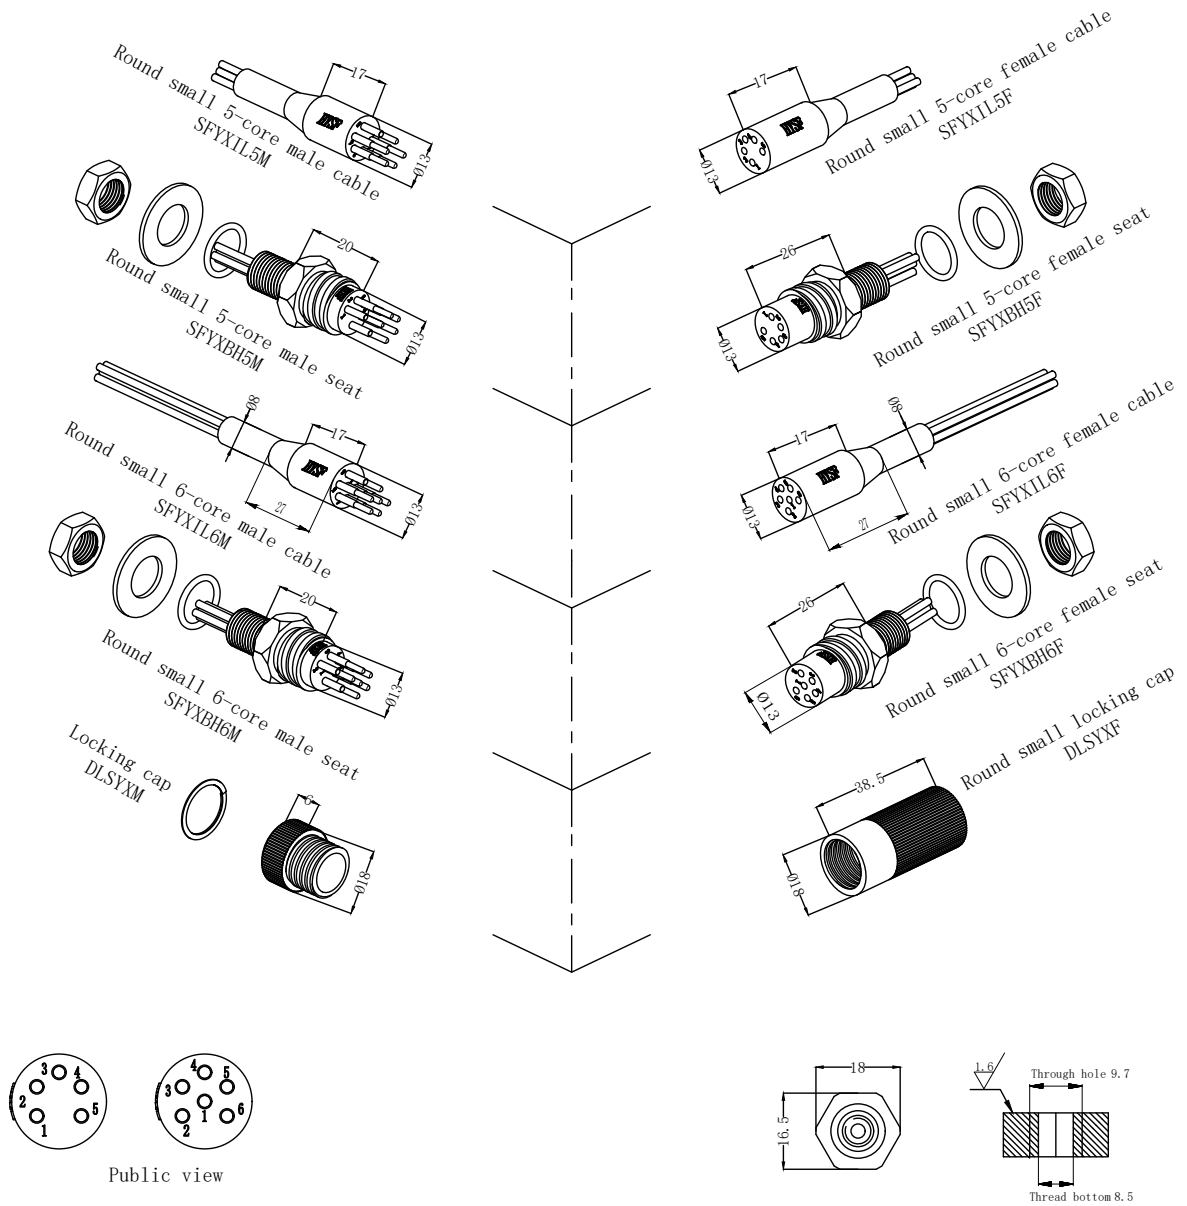

Main parameters:

Electrical parameters of
 Round small 5-6 core: 550V @ 5A
 Insulation resistance: >200 MΩ
 contact resistance: <0.01Ω
 Wet plug and pull times: >500次
 Operating temperature: -60° ~ +80° C
 Working depth: 6000M(60 MPa)

Material parameters:

Plug body: Neoprene
 Socket body: 316L stainless steel,
 Titanium alloy, Sea copper
 Cable body: Polyurethane, Neoprene
 Needle core: Copper gilding
 Installation requirements:
 Installation radius: 9.3
 Surface finish: Ra1.6

Dimension units: millimeter

Thread unit: inch
 Mounting thread: 3/8-24UNF-2A
 Thread length: 15mm

Can be customized upon request