


Underwater network camera

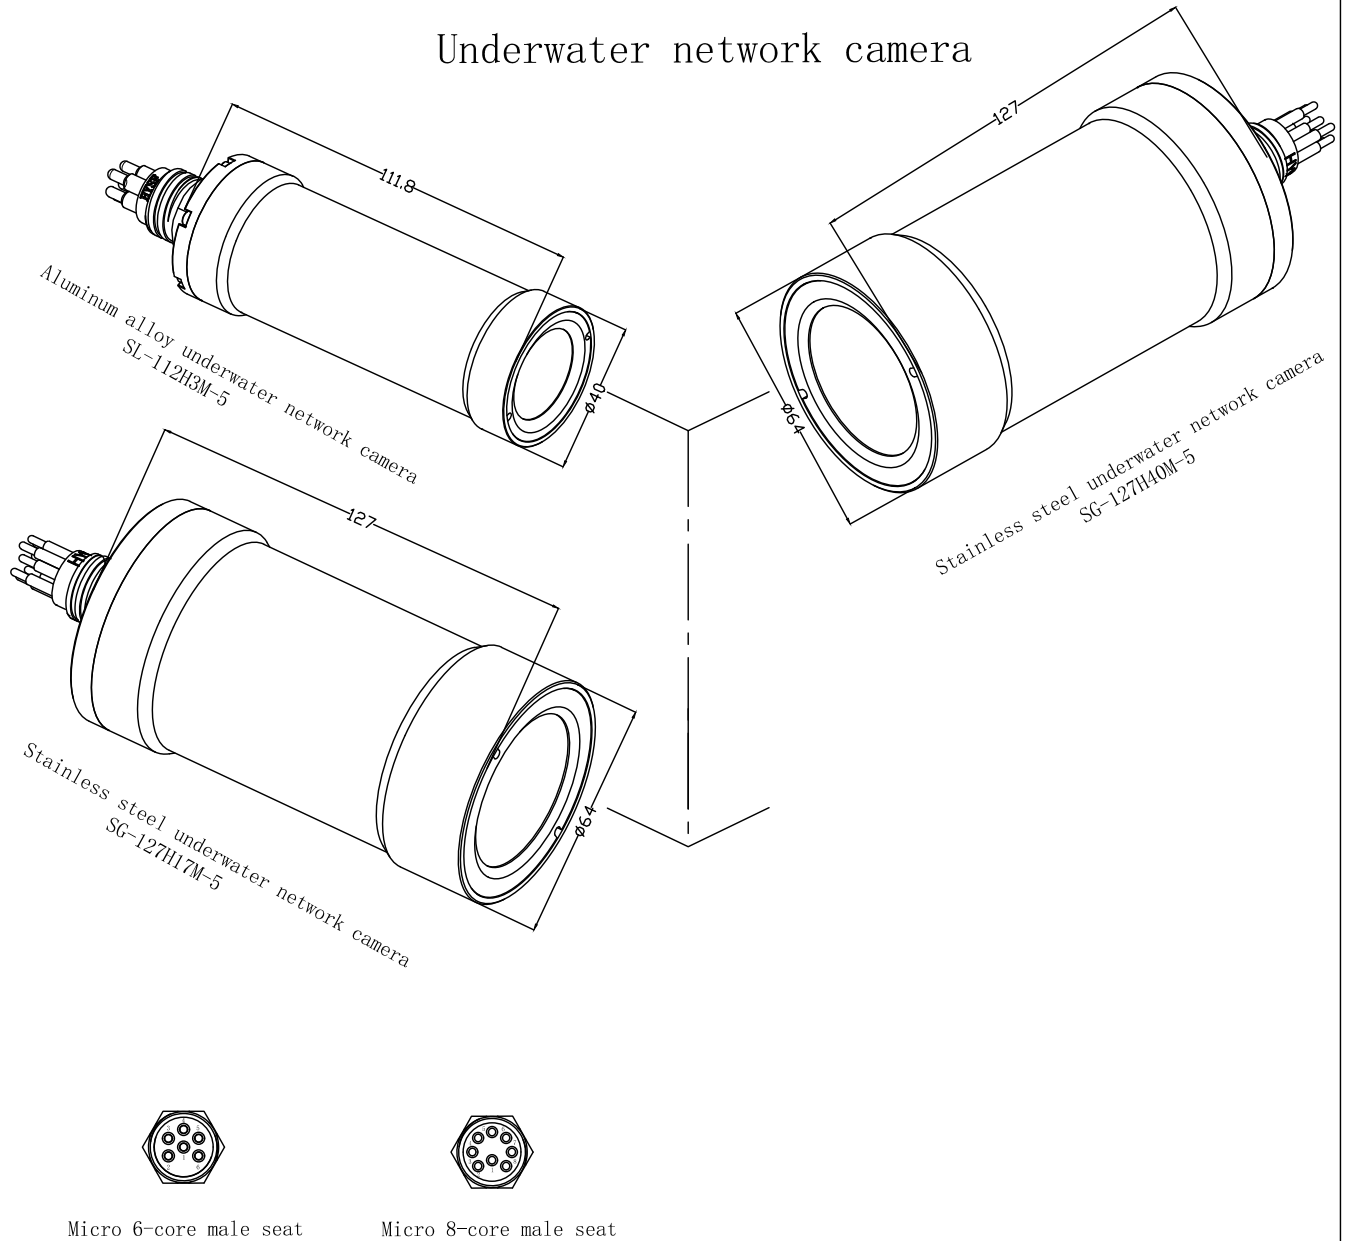

Product Name	Shell Material	Depth Grade	Weight	Working voltage: 12V
SL-112H3M-5	black hard anodized aluminum	300m (3Mpa)	243g	Power: 1.32W
SG-127H17M-5	316L	1700m (17Mpa)	1456g	Working temperature -20 °C~+65 °C
SG-127H40M-5	316L	4000m (40Mpa)	1924g	Field of view angle: 90 °
				Resolution: 2 million pixels or 5 million pixels
				Supporting protocols: Hikvision/ONVIF/RTSP
				Connection method: MCBH6M/MCBH8M
				Support cable length: 100Mbps network ≤ 85 meters,
				Gigabit network ≤ 120 meters